



AM 4 AM

Advanced Materials
for
Additive Manufacturing

**We create
materials that
shape the future**



Production of New Metal Powders for Additive Manufacturing by Cold Plasma Technology : the Use Case of HiperAl

EPIC Meeting
15th of May 2023




AM 4 AM

Advanced Materials
for
Additive Manufacturing



We create materials that shape the future

Challenge


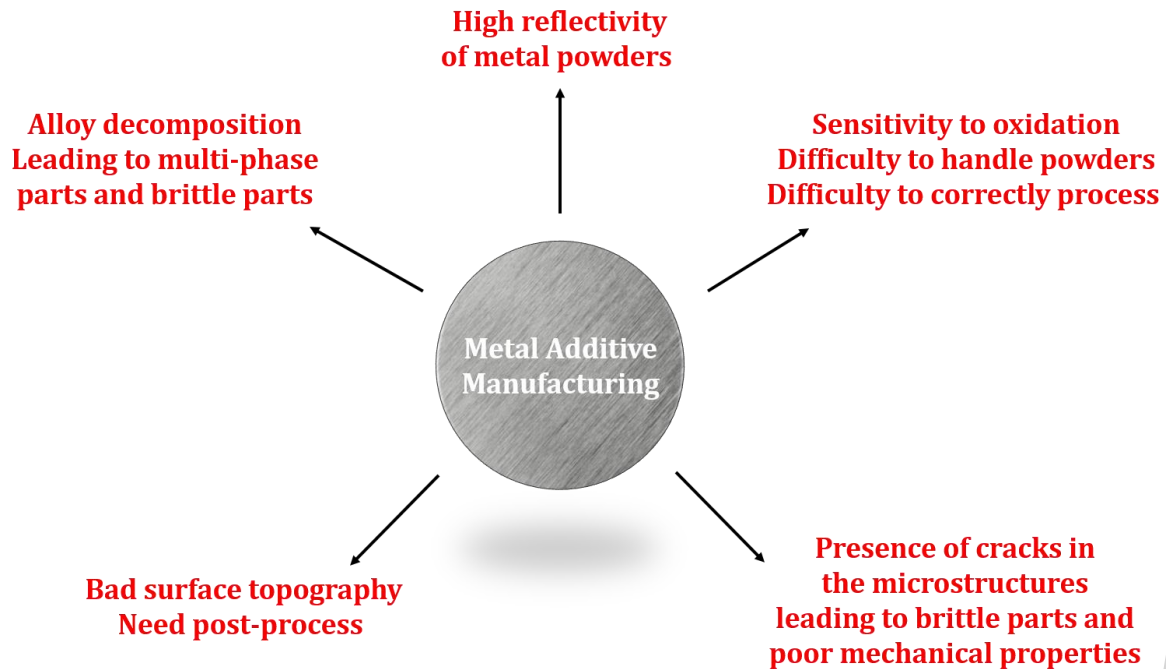


Constraints

- Laser/matter interaction
- High Thermal gradient
- Reactive materials

Our Innovative Technology

Our atmospheric cold plasma treatment (LU101177) allows the dispersion of ceramic particles on the surface of metallic powders to enhance the properties and processability of conventional alloys

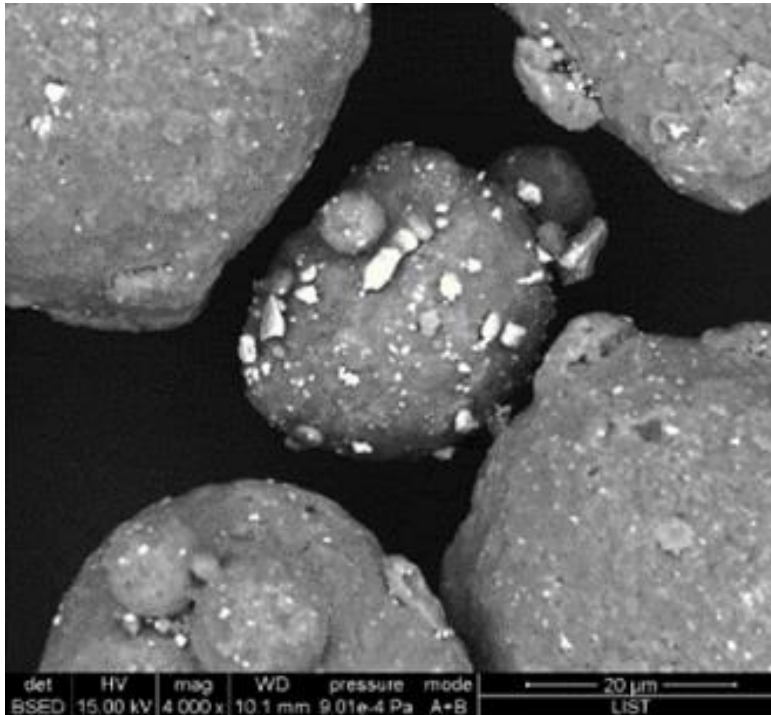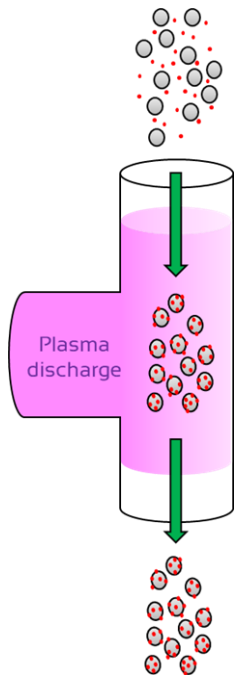


Our technology is...


- Making available **hundreds of conventional alloys**
- Creating **new alloys** designed for AM process
- Allowing **short time** alloy development
- **CO2 neutral**

Aluminium in AM


The major problem with aluminum is the cracks/porosity formation that leads to **brittle** parts and **inappropriate mechanical properties**

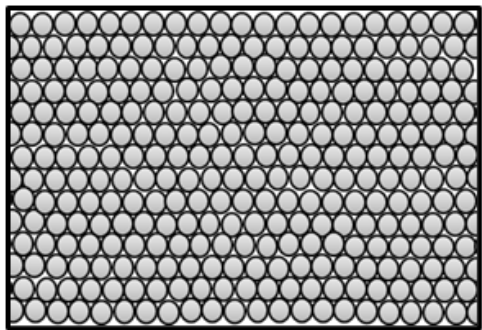

Conventional aluminum powder

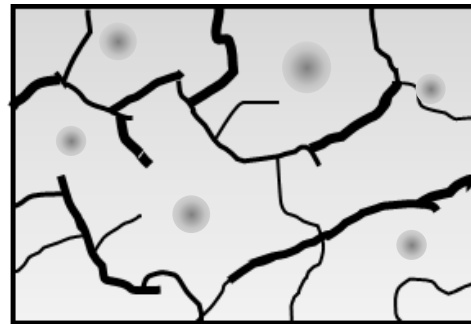

Cracks/porosity due to the process constraints

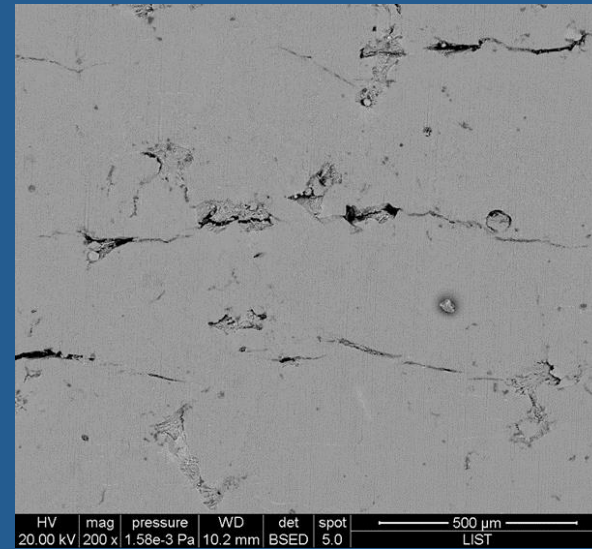

Scanning Electron Microscopy of a 7000 series aluminum processed by Additive Manufacturing.


The microstructure is full of cracks and pores. These defects are bringing down the mechanical properties of printed parts

Need of **new materials** designed specifically for additive manufacturing process

HiperAl




HiperAl

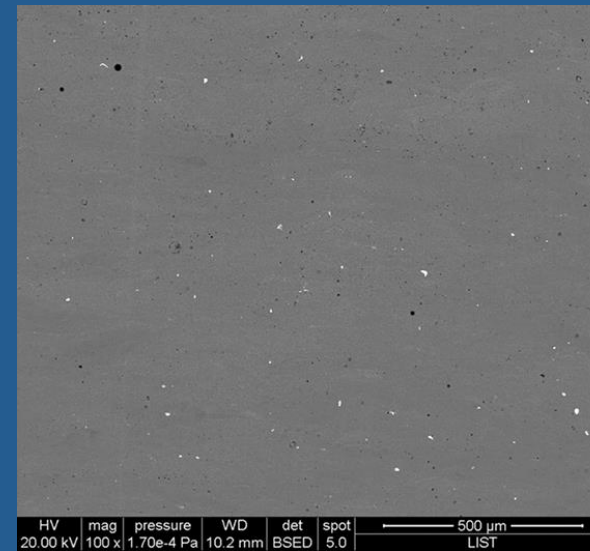

Scanning Electron Microscopy of a HiPerAl aluminum processed by Additive Manufacturing.

The microstructure is dense with no cracks. The mechanical properties of printed parts are maximized.

Our technology has been applied to aluminum alloy leading to our first product : **HiperAl**

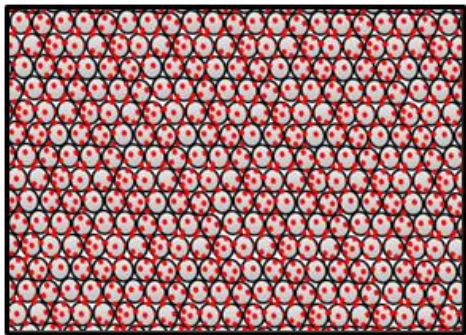

HiperAl



Crack-free - Strong parts

- Exceptional mechanical properties
- Corrosion resistant
- Compatible with the majority of AM equipment

Mechanical properties

Yield Strength

AlSi10Mg – 230 MPa

HiperAl – 425 MPa

Ultimate Tensile Strength

AlSi10Mg – 350 MPa

HiperAl – 465 MPa

Elongation at break

AlSi10Mg – 11%

HiperAl – 4%

Main characteristics



HiperAl has been designed to sustain additive manufacturing constraints



AM 4 AM

Advanced Materials
for
Additive Manufacturing



CONTACT US!

Location

Technoport Hall 3B
20 rue du commerce
3895 Foetz - Luxembourg

Web

www.am-4-am.com
info@am-4-am.com


Phone number

+352661390872


Social media



HiperAl vs 7075 mechanical properties

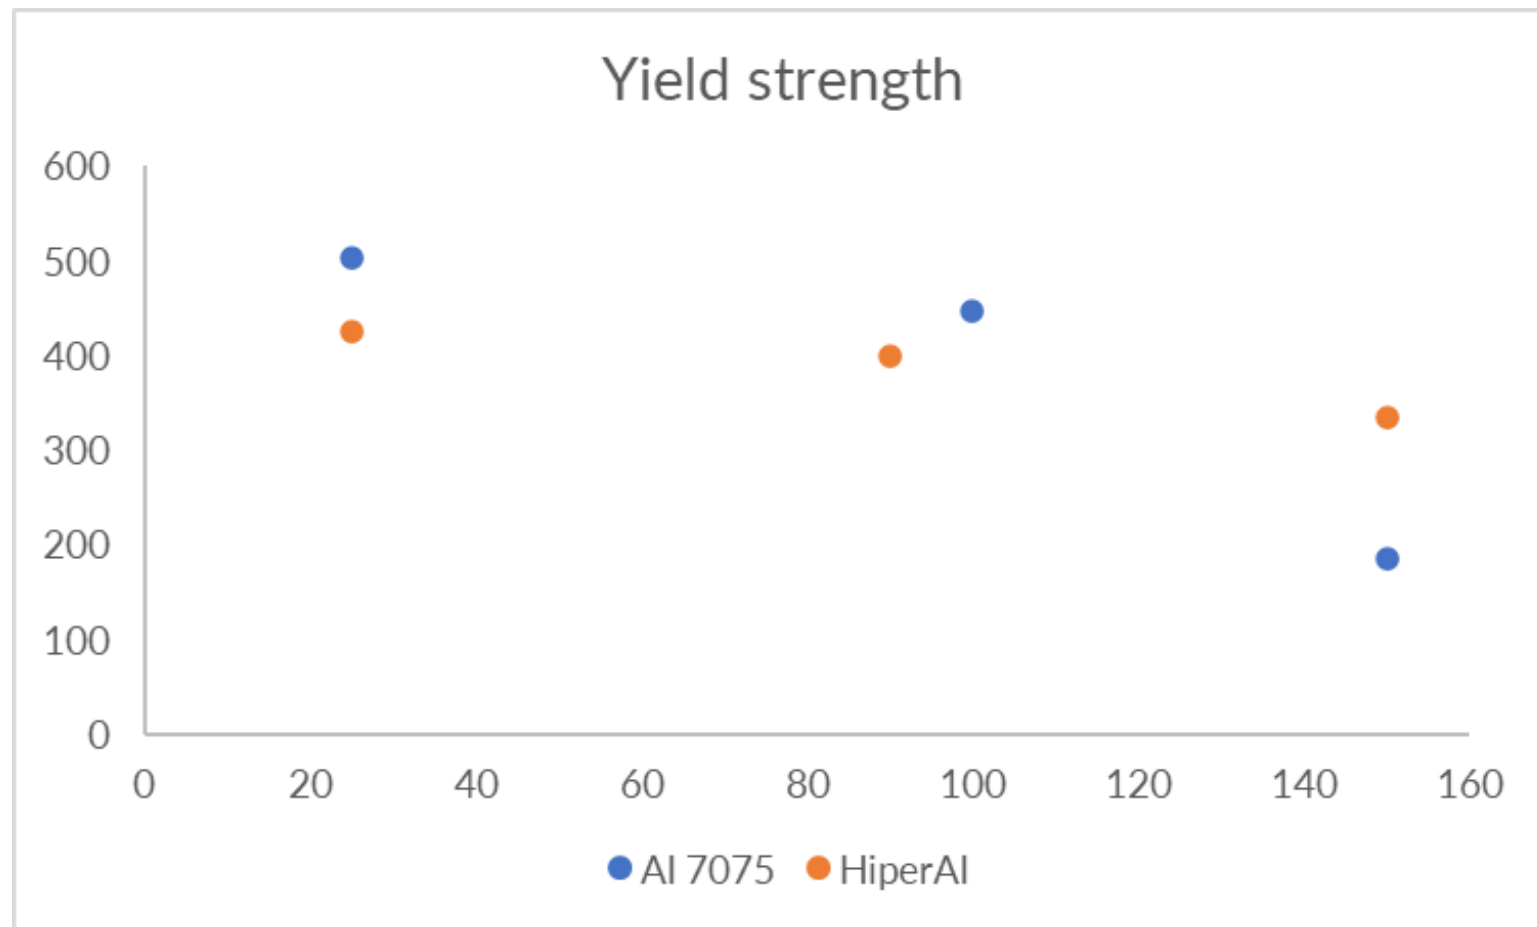

HiperAl vs 7075 mechanical properties

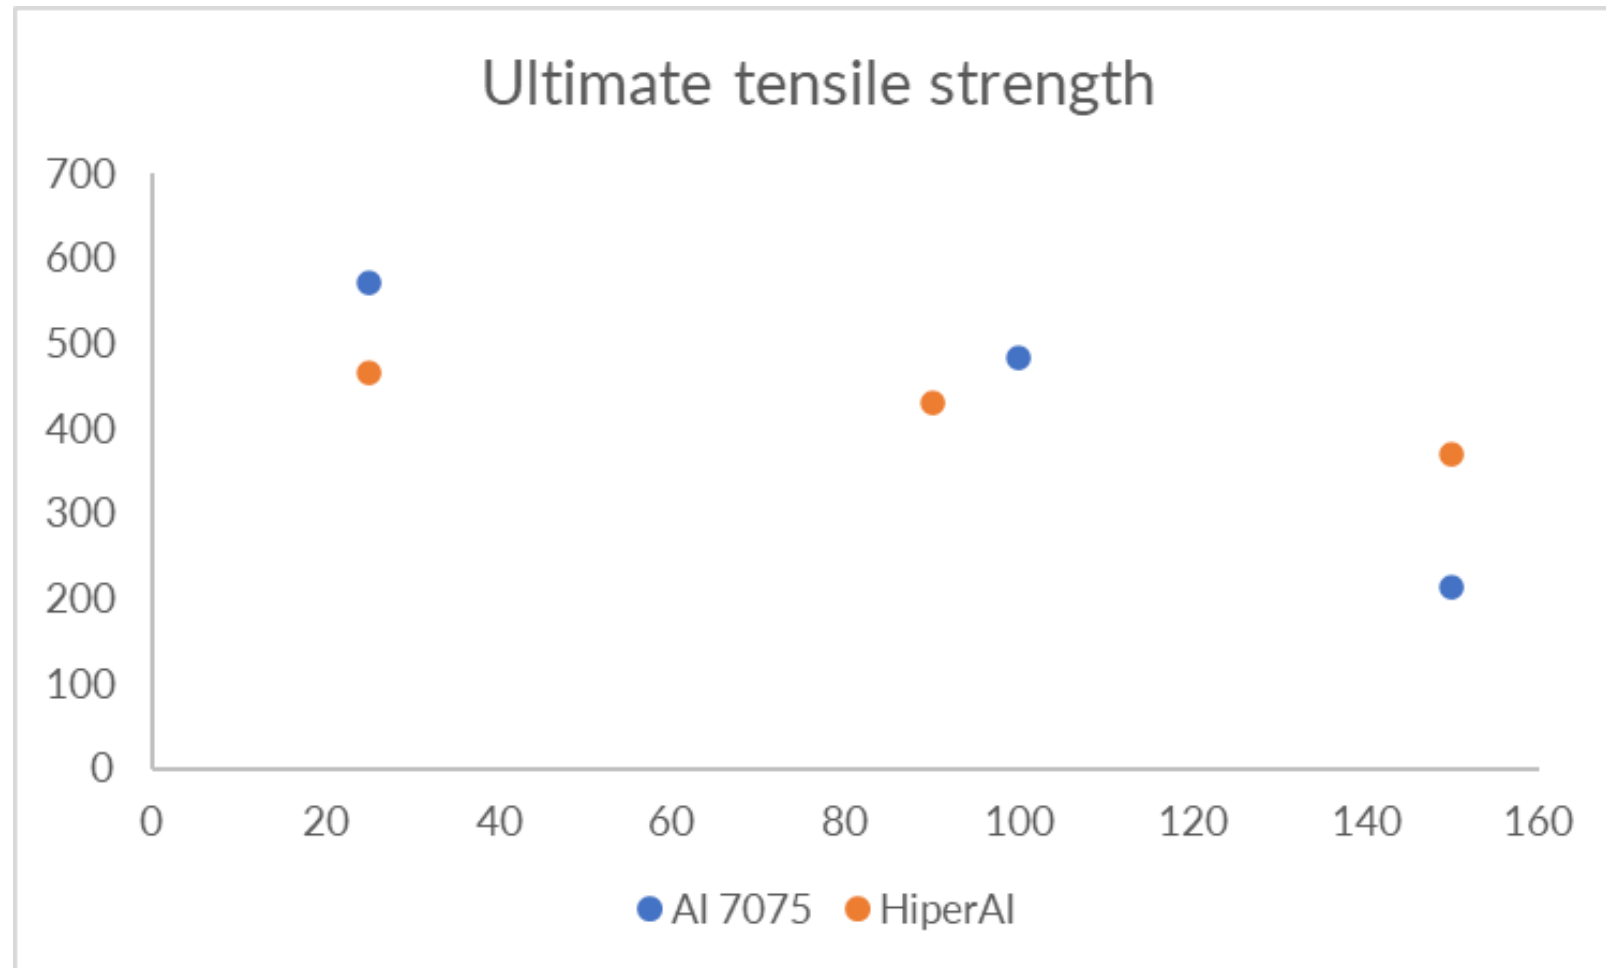

HiperAl vs 7075 mechanical properties

